

15.7 % EFFICIENCY

UP TO 260 W

60 CELLS



Exceeds the IEC standard 3 times over
Because standards are there to be surpassed.



Designed for fire safety
Because plant fires mean more than financial losses alone.



99% relative efficiency at weak-light
Because a 3% increase in yield is better than nothing.




25 year linear performance guarantee
10 year product warranty.



Protection against the weather and the elements
Because long term performance matters.



2 years of free insurance included
Because you never know what tomorrow might bring.

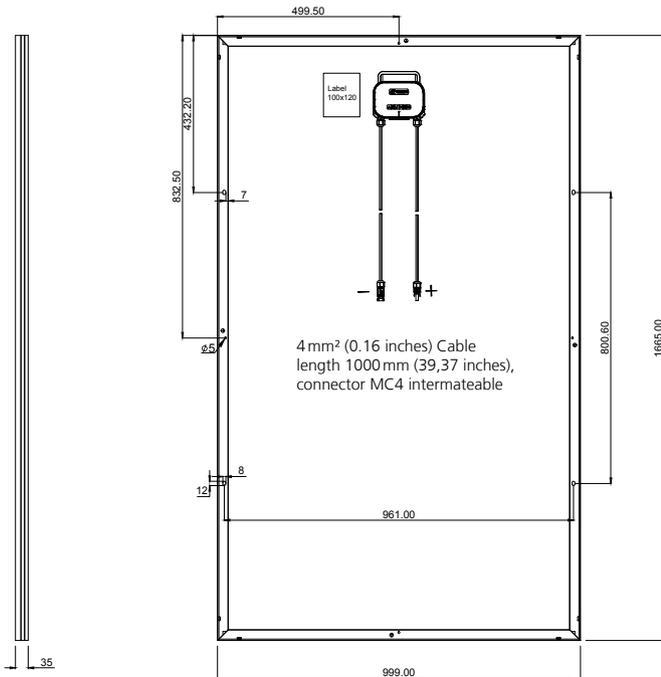

WST series Rear view

Mechanical data

Cell	Polycrystalline 156 x 156 mm silicon cells
Quantity and wiring of cells	60 in series
Dimensions	1,665 x 999 x 35 mm (65.55 x 39.33 x 1.38 in)
Weight	19.0 kg (41.9 lbs)
Glass thickness	3.2 mm (0.13 in)
Frame	Silver/black anodised aluminium
Junction box	IP 65
Connector type	QC Solar / QC4 (IP67); Multi-contact / MC4 (IP67); Tyco / PV4 (IP67)

Operating conditions

Operating temperature	-40 °C to +85 °C -40 °F to +185 °F
Maximum system voltage IEC/UL	1,000 V/1,000 V
Maximum reverse current	15 A
Maximum load	5,400 Pa
Nominal operating cell temperature NOCT	45 °C ±3 °C
Temperature coefficient of P_{MAX}	-0.43 %/°C
Temperature coefficient of V_{OC}	-0.33 %/°C
Temperature coefficient of I_{SC}	0.05 %/°C

Certifications

IEC 61215, IEC 61730-1/-2, UL 1703 Ed. 3, MCS, JET, CE, WEEE

Electrical data (STC)		WST-250P6	WST-255P6	WST-260P6	
Nominal performance	P_{MAX}	250	255	260	Wp
Voltage at maximum performance	V_{MP}	30.7	31.0	31.3	V
Current at maximum performance	I_{MP}	8.15	8.24	8.33	A
Open circuit voltage	V_{OC}	37.5	37.7	37.9	V
Short circuit current	I_{SC}	8.53	8.6	8.67	A
Module efficiency		15.1	15.4	15.7	%

Reduction in the module efficiency rating from 1,000 W/m² to 200 W/m²: < 4%. The electrical data applies under standard test conditions (STC): solar radiation 1,000 W/m² with light spectrum AM 1.5, with cell temperature 25 °C. Measurement tolerance of P_{MAX} at STC: ±3%. Accuracy of other electrical data: ±10%.

Electrical data (NOCT)		WST-250P6	WST-255P6	WST-260P6	
Nominal performance	P_{MAX}	183	187	190	Wp
Voltage at maximum performance	V_{MP}	27.8	28.0	28.2	V
Current at maximum performance	I_{MP}	6.6	6.69	6.74	A
Open circuit voltage	V_{OC}	34.1	34.3	34.4	V
Short circuit current	I_{SC}	7.05	7.11	7.17	A

The electrical data applies under normal operating cell temperature (NOCT): solar radiation 800 W/m², AM 1.5, air temperature 20 °C, wind speed 1 m/s.

Good to know

This frame type, produced fully from aluminium, guarantees the maximum in stability and protection against material fatigue. The inside corner elements provide for greater torsional stiffness and waterproofing in the critical corner areas where the material is at its weakest and guarantee the best possible transfer of tension between the individual frame sections.

WINAICO is a trademark of Win Win Precision Technology Co., Ltd.

WINAICO Deutschland GmbH · Industriestraße 68 · 97993 Creglingen · Germany
Phone +49 7933 700 300 · Fax +49 7933 700 3010 · www.winaico.com